

IFD-72T-PC

7 Inch Forehead Temperature Monitoring 2MP Binocular living facial recognition terminal



Features.


- > Integration of facial capture, comparison function, infrared temperature Monitoring function
- > Support the output of real-time video stream to other device, one complete facial capture, recognition, infrared temperature detection function
- > Temperature anomaly alarm: non-contact forehead temperature detection within one second , detection distance 25-40cm, temperature error range $\pm 0.5^{\circ}\text{C}$, abnormal temperature linkage acousto-optic alarm
- > Industrial grade design, pitch Angle, left and right rotation adjustable
- > Support living facial detection, effective prevention of photos and video spoofing
- > Face database can reach 10,000pcs, flexible face template import, support single, batch image file import and real-time capture import
- > Support face types of ordinary people, whitelist people, blacklist people, etc.
- > Support recognize result linkage I/O, wiegand port output, voice broadcast
- > Support IC card Reader Modules optional
- > Can be widely used in access control channels, wall-mounting attendance and other scenarios.

Specifications.

Screen	
Dimensions	7 inch, full-angle IPS LCD screen
Resolution	1280x720
Camera	
Type	Dual Camera Design
Sensor	1/2.8" SONY starlight CMOS
Resolution	1080P @ 30fps
Lens	3.6mm*2
Body temperature Monitoring	
Monitoring site	forehead
Temperature range	34-42 °C
Temperature Monitoring distance	25-40cm
Temperature Monitoring accuracy	± 0.5 °C
Temperature Monitoring response	≤ 1 s
Facial recognition	
Detection Type	Support living facial detection, effective prevention of print photos, phone photos and video spoofing
Facial recognition distance	0.3-1.3m, support detection target size filter adjustment
Recognize face size	Pupils distance ≥ 60 pixels; Face pixel ≥150 pixels
Face database capacity	Support built-in ≤ 10000 faces; support black/white list
Posture	Support side face filter, comparable within 20 degrees in vertical and 30 degrees in horizontal
Occlusion	Ordinary glasses and short sea retention have no effect on recognition.
Expression	Under normal circumstances, slight expressions do not affect recognition.
Response Speed	≤ 1 s
Face exposure	Support
Local Storage	Support storage of 100,000 records
Recognition area	Full image recognition, support zone optional setting
Upload Method	TCP, FTP, HTTP, API function calling upload
Network Functions	
Network protocol	IPv4, TCP/IP, NTP, FTP, HTTP
Interface protocol	ONVIF, RTSP
Security Mode	Authorized username and password
Event linkage	TF card storage, FTP upload, alarm output linkage, Wiegand output linkage, voice broadcast
System Upgrade	Support remote upgrade
Other	/
Accessories	
Supplementary light	IR light, LED white light
Identification Module	Support built-in IC card reader module optional
Speaker	Support voice broadcast after successful recognition
Network Module	-

Interface	
Network Interface	RJ45 10M/100M Network Adaptation
Alarm Input	2CH
Alarm Output	2CH
RS485 interface	Support
TF card slot	Supports up to 128G of local storage
USB	Support
Wiegand interface	Support Wiegand 26, 34, 66 protocols
Reset key	Support
Sim Card	Support

General	
Operating Temperature	-20°C ~ 60°C
Working humidity	0%-90%
Protection Level	/
Power Supply	DC12V
Power dissipation (maximum)	≤ 12 W
Dimensions (mm)	238mm(H)*120mm(W) / 9.4inch(H)*4.7inch(W)
Installation Method	Wall installation / Floor stand installation

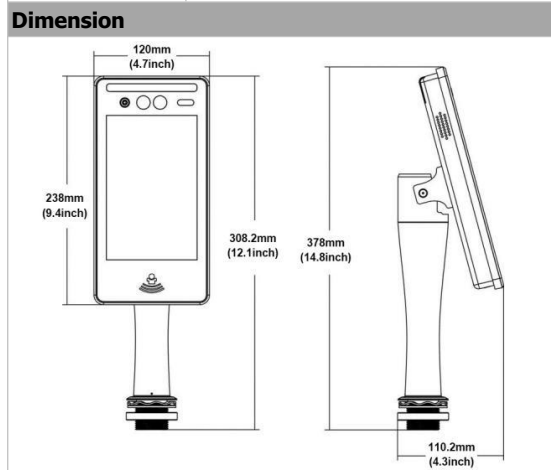

Interfaces	
	1-Wiegand 2 2-Alarm out 2 3-Network Interface 4-Power input 5-Alarm out1+RS485 6-Alarm in 7-USB

Brackets	
<p>Turnstile Bracket (Included)</p>	<p>Floor stand Bracket (Optional)</p>
Hole size on turnstile top cover: Ø40mm(±2)	> Material: high-grade steel > 1-1.5m height-adjustable > Support base screw fixed