

NVR-M64-8VA

64ch 8HDD Network Video Recorder



64
ch

PoE

8HDD
2U


Key Features

- Support Ultra H.265/H.265/H.264 video formats
- 16/32/64-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 2-ch HDMI, 1-ch VGA. HDMI1 and HDMI2 up to 4K (3840x2160) resolution
- HDMI1, HDMI2, VGA independent outputs provided
- Up to 12 Megapixels resolution recording
- Support RAID 0, 1, 5, 6, 10
- 8 SATA HDDs, Up to 10TB for each HDD
- Various fisheye dewarping modes for live view and playback for both web interface and GUI
- Support N+1 Hot spare
- Support for 12V Power output
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

Specifications

Model	NVR-M16-8VA		NVR-M32-8VA	NVR-M64-8VA
Video/Audio Input				
IP Video Input	16-ch		32-ch	64-ch
Two-way Audio Input	1-ch, RCA			
Network				
Incoming Bandwidth	384Mbps			
Outgoing Bandwidth	384Mbps			
Remote Users	128			
Protocols	P2P, UPnP, NTP, DHCP, PPPoE			
Video/Audio Output				
HDMI/VGA Output	VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI1/HDMI2(HDMI audio output is not supported): 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz			
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF			
Audio Output	1-ch, RCA			
Synchronous Playback	16-ch			
Corridor Mode Screen	3/4/5/7/9/10/12/16		3/4/5/7/9/10/12/16/32	
Decoding				
Decoding format	Ultra 265, H.265, H.264			
Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF			
Capability	2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080P@30		2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080P@30, 32 x 960P@25	2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080P@30, 32 x 960P@25, 36 x 720P@30, 64 x D1
Hard Disk				
SATA	8 SATA interfaces			
Capacity	up to 10TB for each HDD			
eSATA	1 eSATA interface			
Disk Array				
Array Type	RAID 0, 1, 5, 6, 10			
External Interface				
Network Interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet Interfaces			
Serial Interface	1 x RS232, 1 x RS485			
USB Interface	Front panel: 2 x USB2.0,Rear panel: 1 x USB3.0			
Alarm In	16-ch			
Alarm Out	4-ch			
General				
Power Supply	100~240 VAC Power Consumption: ≤ 25 W (without HDD)			
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)			
Dimensions (W×D×H)	442mm ×426mm× 89mm (17.4" × 16.8"× 3.5")			
Weight (without HDD)	≤ 5.7Kg (12.57lb)			

Dimensions

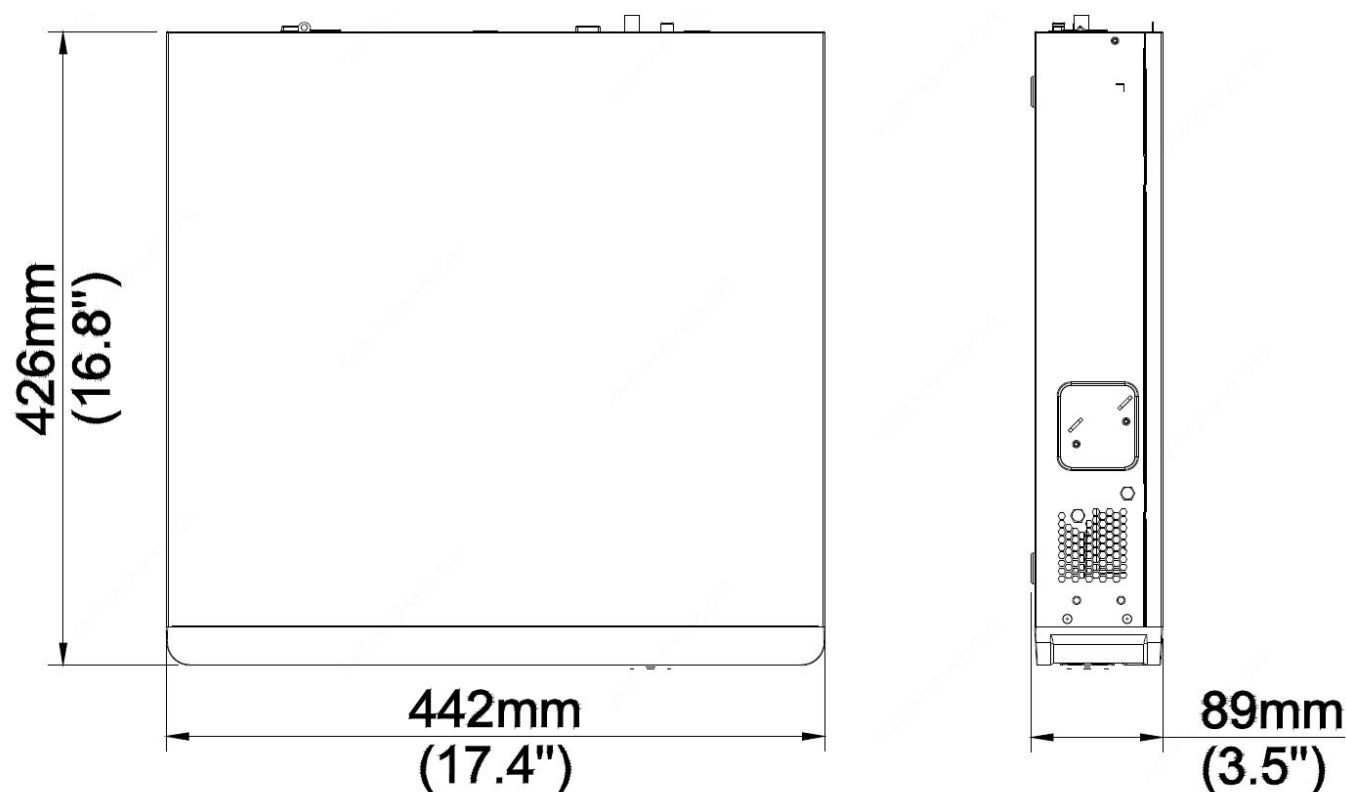

Rear Panel

