

IP-2DM-F28/F36-DA

2MP HD IR Fixed Dome Network Camera



Features

- 2MP Fix Mini Vandal proof Dome IP Camera
- 1/2.7" Progressive CMOS, MIC, MicSD(Up to 256GB), Metal



Specifications

Video	
Imaging Device	1/2.7"
Effective Pixels	2MP 1920(H)×1080(V)
Scanning System	Progressive CMOS
Min. Illumination	Color 0.1lux @ F1.2(AGC ON) ; B/W 0 lux @ IR ON
Lens Type	
Focal Length (Zoom Ratio)	2.8mm
Max. Aperture Ratio	F No. 2.2

Angular Field of View	Horizontal: 103°, Vertical: 55°, Diagonal: 126°
Min. Object Distance	0.8m
Lens Type	Fixed(M12)
Operational	
IR Viewable Length	Up to 20m
Camera Title	On/Off
Day & Night	IR cut filter with auto switch (Day/Night/Auto/Schedule)
Backlight Compensation	Off/On (5 Zone)
Wide Dynamic Range	DWDR
Digital Noise Reduction	3D DNR
Motion Detection	Off/On (8 Level)
Privacy Masking	Off/On (4 Zone, Rectangle)
Gain Control	Auto
White Balance	Auto/Manual
Electronic Shutter Speed	1/5 ~ 1/20000s
Mirror	Flip/Rotation
On-Board Storage	Micro SD slot, up to 256GB
Alarm	NA
Audio	Built-in microphone
Hardware Reset	Yes
Smart Feature	NA
Network	
Ethernet	RJ45(10/100BASE-T)
Video Compression Format	H.265/H.264
Resolution	Main Stream 1080P(1920x1080) Sub Stream VGA(640x480)
Video Quality Ajustment	128Kbps ~ 4Mbps
Bitrate control method	CBR/VBR
Streaming Capability	Dual-Stream(Main/Sub)
Protocol	TCP/IP,HTTP,DHCP,DNS,DDNS,RTP/RTSP,

	SMTP,NTP,UPnP,SNMP,HTTPS,FTP
Security	IP address filter;complicated password;Authenticated username and password
Streaming Method	Unicast/Multicast
Application Programming Interface	ONVIF(Profile S/G/T)
Environmental	
Operating Conditions	-30 ~ +55°C/less than ≤ 95% RH
Storage Conditions	-30 ~ +60°C/less than ≤ 95% RH
Ingress Protection	IP66
Electrical	
Input Voltage / Current	D12V/POE(IEEE802.3af)
Power Consumption (IR OFF)	1.5W/2.5W
Power Consumption (IR ON)	3W/4.5W
Mechanical	
Material	Metal



Dimensions

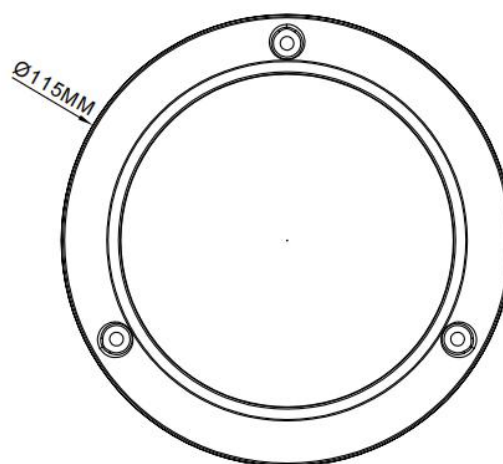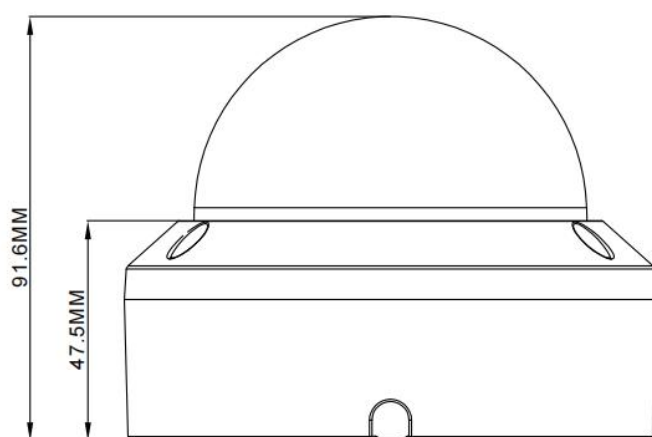

Accessories



CH115D-R



CH115B-R

